


1 2 3 4 5 6 7 8

A

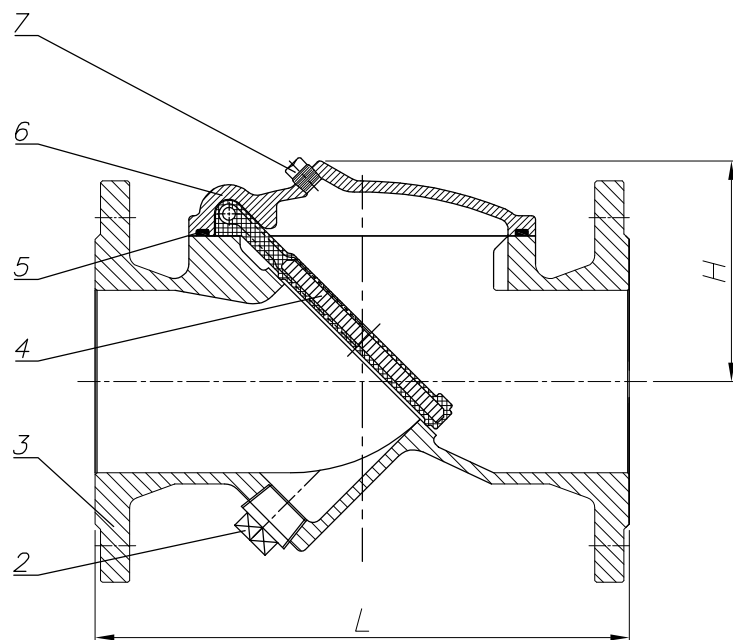

A

B

B

C

C

D


D

E

E

F

F

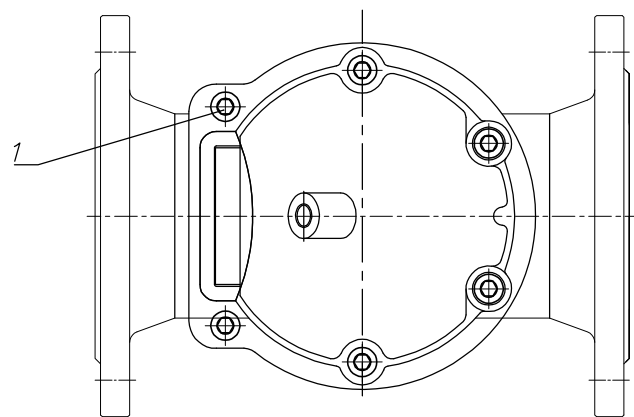


Size	DN50	DN65	DN80	DN100	DN125	DN150	DN200	DN250	DN300
L	204	216	241	292	349	382	495	622	698
H	94	95	107	122	139	160	210	250	290

Notes:

1.Working pressure:16bar.

2.Flange to EN1092-2,PN16.

3.FBE Coated, color:Ral 5015,thickness:300 micron.

7	Plug(Optional)	Malleable Iron	
6	Cover	Ductile Iron, EN1563,EN-GJS-450-10	
5	Gasket	Rubber, EPDM/NBR	
4	Disc	EPDM/NBR Encapsulated steel	
3	Body	Ductile Iron, EN1563,EN-GJS-450-10	
2	Plug	Malleable Iron	
1	Screw	Carbon steel	
No.	Description	Material	
<div>SOVAL™</div>		NAME	DATE
		ENGINEER/ DRAFTSMAN	FLL 9/27/20
		1st CHECK	SJX 9/27/20
		2nd CHECK	THX 9/27/20
		3rd CHECK	HTX 9/27/20
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM		4th CHECK	TJF 9/27/20
		APPROVED	ZHT 9/27/20
MATERIAL		1020 SERIES	
WEIGHT			
FINISH			
DO NOT SCALE DRAWING		SHEET 1 OF 1	
TITLE: GA Drawings of Flex Check Valve		REVISION A	
REVISION	DESCRIPTION	DATE	BY
A	INITIAL ISSUE	9/27/20	FLL
SCALE: NONE - UNLESS NOTED			

1 2 3 4 5 6 7 8