


## 500 Series PVC Sch-80 Elbow 90°

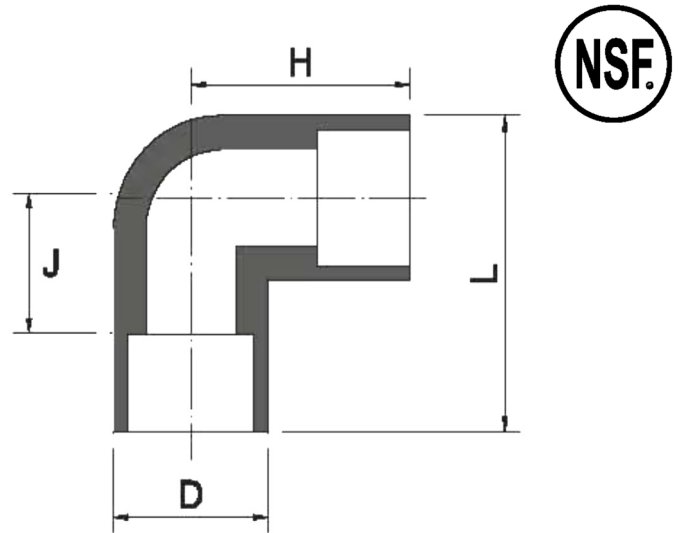

### SPECIFICATIONS

- SIZES: 1/2" - 24"
- TYPE: SOC x SOC
- MATERIAL: UPVC/CPVC
- STANDARD: ANSI SCH-80

### INSTALLER

THE PLASTIC SYSTEM PIPELINE DESIGN AND INSTALLATION MUST COMPLY WITH THE MANUFACTURED STANDARDS AND SPECIFICATIONS. CONFIRM IF INTENDED APPLICATION IS COMPLIANT BEFORE INSTALLING.

### JOINT-SOLVENT CEMENTING

CHOOSE THE RIGHT PRIMER AND CEMENT AND USE THE PROPER APPLICATOR ACCORDING TO MANUFACTURER'S INSTRUCTIONS.

### JOINTING-THREADED CONNECTIONS

USE THE QUALITY JOINT COMPOUNDS AND/OR TEFLON TAPE SEALING. SOME SEALING COMPOUNDS CONTAIN CHEMICALS THAT CAN CAUSE STRESS CRACKING. THREADED CONNECTIONS ONLY REQUIRE ONE OR TWO TURNS. DO NOT OVERTURN.

**DO NOT USE COMPRESSED AIR OR GAS ON THE PLASTIC PIPING SYSTEM.**

**DO NOT USE COMPRESSED AIR OR GAS WHEN TESTING THE PLASTIC PIPING SYSTEM.**

MEASUREMENTS (INCHES)				
SIZE	D	J	H	L
1/2"	1 3/16	19/32	1 15/32	2 1/16
3/4"	1 7/16	21/32	1 21/32	2 3/8
1"	1 21/32	27/32	1 31/32	2 3/4
1 1/4"	2 3/32	1 3/32	2 11/32	3 3/8
1 1/2"	2 3/8	1 9/23	2 21/32	3 3/4
2"	2 7/8	1 17/32	3 1/32	4 5/16
2 1/2"	3 15/32	1 3/4	3 1/2	5 1/8
3"	4 5/32	2 1/8	3 31/32	6 1/16
4"	5 1/4	2 19/32	4 27/32	7 15/32
5"	7 19/32	4 1/16	6 11/16	10 1/2
6"	7 19/32	3 3/4	6 11/16	10 1/2
8"	9 21/32	4 27/32	8 25/32	13 5/8
10"	12 7/16	5 25/32	11 11/32	17 9/16
12"	15 5/8	7 3/32	13 13/32	20 11/16
14"	15 19/32	7 15/32	14 17/32	22 11/32
16"	17 11/16	9 11/32	17 1/16	25 29/32
18"	19 7/8	10 5/16	19 5/16	29 1/4
20"	22 1/8	16 35/64	26 37/64	37 41/64
24"	26 41/64	21 15/32	33 43/64	46 63/64