


650 Series Brass Check Valve

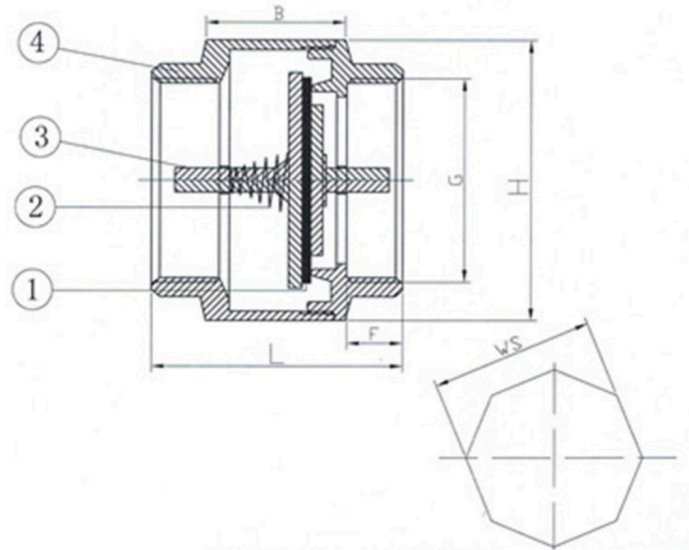

SPECIFICATIONS

- MAX. TEMPERATURE: ≤194°F
- MAX. PRESSURE: 150 PSI
- IN-LINE SPRING LOADED CHECK VALVE
- 200 WOG
- ANSI B2.11 THREADED ENDS

COMPONENTS		
NO.	BODY PART	MATERIAL
1	WASHER	NBR
2	SPRING	STAINLESS STEEL
3	SPINDLE	BRASS
4	BODY	BRASS

DIMENSIONS (INCHES)						
SIZE	L	B	H	F	WS	
1/2"	1.69	0.94	1.50	0.43	0.96	
3/4"	1.95	1.02	1.69	0.47	1.22	
1"	2.24	1.22	1.83	0.59	1.44	
1 1/4"	2.64	1.38	2.36	0.53	1.81	
1 1/2"	2.72	1.42	2.60	0.61	2.09	
2"	2.91	1.65	3.23	0.65	2.52	
2 1/2"	3.19	1.77	3.68	0.73	3.17	
3"	4.06	2.40	4.06	0.79	3.78	
4"	4.41	2.52	5.63	0.83	4.80	