


811-SS-OSY / 811-SS-IP Series Supervisory Switches

811-SS-OSY Series (811-SS-OSY-1 / 811-SS-OSY-2 / 811-SS-OSY-3) Supervisory Switch for OS&Y Gate Valves



FEATURES	
WEIGHT	1.32 LB
ENCLOSURE	COVER: DIE CAST, ALUMINUM ALLOY, ASTM B85 A04130 FINISH: RED POWDER COAT BASE: DIE CAST, ALUMINUM ALLOY, ASTM B85 A04130 ALL PARTS HAVE CORROSION RESISTANT FINISHES
COVER TAMPER	TAMPER RESISTANT SCREWS COVER TAMPER SWITCH AVAILABLE 3 AMPS / 5 AMPS AT 125/250 VAC
CONTACT RATINGS	811-SS-OSY-1: ONE SET OF SPDT 811-SS-OSY-2: TWO SETS OF SPDT 811-SS-OSY-3: TWO SETS OF SPDT AND COVER TAMPER SWITCH 10 AMPS AT 125/250 VAC 2.5 AMPS AT 30 VDC RESISTIVE
CONDUIT ENTRANCES	ONE KNOCKOUTS AND ONE HOLE FOR ½" CONDUIT PROVIDED
SERVICE USE	NFPA 13, 13D, 13R, 72
IP 67	

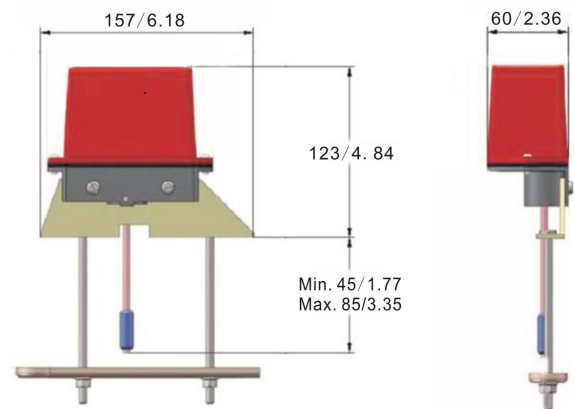

811-SS-IP Series (811-SS-IP-1 / 811-SS-IP-2 / 811-SS-IP-3) Supervisory Switch for Indicator Post and Stop Valves



FEATURES	
WEIGHT	0.99 LB
ENCLOSURE	COVER: DIE CAST, ALUMINUM ALLOY, ASTM B85 A04130 FINISH: RED POWDER COAT BASE: DIE CAST, ALUMINUM ALLOY, ASTM B85 A04130 ALL PARTS HAVE CORROSION RESISTANT FINISHES
COVER TAMPER	TAMPER RESISTANT SCREWS COVER TAMPER SWITCH AVAILABLE 3 AMPS / 5 AMPS AT 125/250 VAC
CONTACT RATINGS	811-SS-IP-1: ONE SET OF SPDT 811-SS-IP-2: TWO SETS OF SPDT 811-SS-IP-3: TWO SETS OF SPDT AND COVER TAMPER SWITCH 10 AMPS AT 125/250 VAC 2.5 AMPS AT 30 VDC RESISTIVE
CONDUIT ENTRANCES	ONE KNOCKOUTS AND ONE HOLE FOR ½" CONDUIT PROVIDED
IP 67	

